

**

CE

SA 8000
IEC TS 62941

2%




STPXXS - B60/Wnh 365-385W

166
1756 × 1039 × 35 (69.1 × 40.9 × 1.4)
20.3 (44.8)
3.2 (0.126)
4.0 (-)350 / (+)160
3

	385	380	375	370	365
(I _{mp} /A)					
(V _{oc} /V)					
(I _{sc} /A)					
%					

STC 1000 W/m, 25 °C, AM1.5; NOCT: 800 W/m, 20 °C, AM1.5, 1 m/s ;

(NOCT)
(P _{max})
(V _{oc})
(I _{sc})
/
/
/

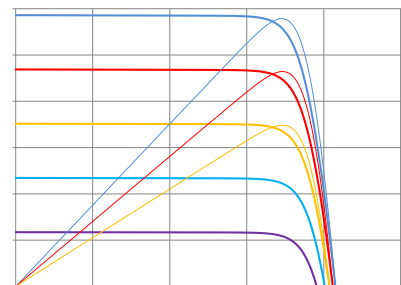

Legend: 1000 W/m², 800 W/m², 600 W/m², 400 W/m², 200 W/m²