

21.1%




2%



2400

5400

*

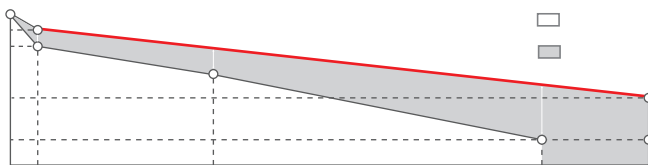

12

0.45%

30






STPXXXS - C78/Pmh+ 570-590W

	182
	2465 × 1134 × 35 (97.0 × 44.6 × 1.4)
	35.5 (78.3)
\	2.0 +2.0 (0.079 +0.079)
	4.0
	(-)350 / (+)160
	3

	mm
	kg
31 /	
620 /13	775 /17.5

Section B-B



Note:mm[inch]

	590	585	580	575	570
(I _{mp} /A)					
(V _{oc} /V)					
(I _{sc} /A)					
%					

STC: 1000 W/m², 25 °C, AM1.5 NDF: 800 W/m², 20 °C, AM1.5, 1 m/s ;

580S

- & -

(I _{mp} /A)
(V _{oc} /V)
(I _{sc} /A)
%

(NDF)
(P _{max})
(V _{oc})
(I _{sc})

