


# Ultra S mini



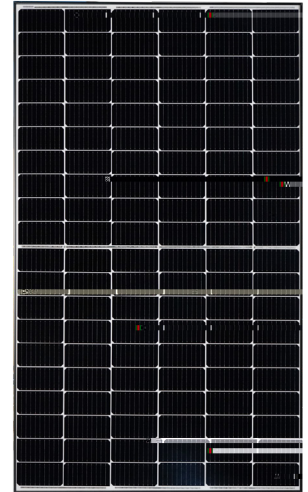


A 


A  A


: - 60/



365-385 A    
 21.1%


 21.1%	
2%	 (5400 ) * (3800 )
	

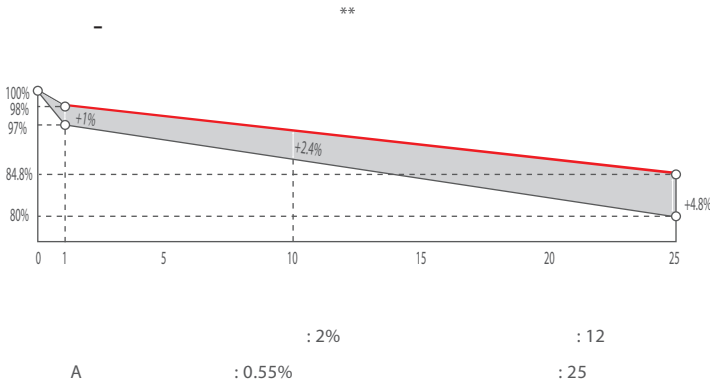

CE IEC 61730 IEC 61215  
 SA 8000  
 ISO 9001  
 ISO 14001  
 ISO 45001 Occupational Health and Safety  
 IEC TS 62941 



Munich RE  \*\*\*\*



**STPXXXS - B60/Wnhm 365-385W**



	166
	120 (6 20)
	1756 1039 35 (69.1 40.9 1.4 )
	20.3 (44.8 .)
	3.2 (0.126 )
	4.0 <sup>2</sup> , (-) 350 (+) 160
	68 (3 )
	-40 +85
	1000 / 1500 ( )
	20 A
	0/+5



	385 - 60/		380 - 60/		375 - 60/		370 - 60/		365 - 60/	
	385	290.9	380	286.3	375	281.9	370	278.2	365	274.3
	34.9	32.4	34.7	32.2	34.5	32.2	34.3	32.0	34.1	31.8
	11.04	8.99	10.96	8.92	10.87	8.76	10.79	8.69	10.71	8.62
	41.5	39.0	41.3	38.9	41.1	38.9	40.9	38.7	40.7	38.5
	11.72	9.46	11.64	9.39	11.57	9.24	11.49	9.17	11.42	9.10
(%)	21.1		20.8		20.6		20.3		20.0	

1000 / <sup>2</sup>, 25 A =1.5; : 800 / <sup>2</sup>, 20 A =1.5, 1 / ; +/- 3%;



( )	42 2
	-0.36%/
	-0.304%/
	0.050%/



	20	40
	31	31
	6	26
	186	806
	1786 1130 1203	
	679	

**Graphs**

(385 )

