


Ultra X Pro Plus STPXXS-D66-Nsh+ 700-720W

N
132 (6 × 22)
2384 × 1303 × 35 (3.9 × 51.3 × 1.4)
3 .5 (82.7)
\ 2.0 + 2.0 (0.079 + 0.079)
4.0 (-)350 / (+)160
STP-XC4
IP68 3
-40 - + 5
1500 V DC (IEC)
35
0/+5 W
(80 ± 5)%
31 /
44 /17.5
2400×1120×1410 / 1222.5 /

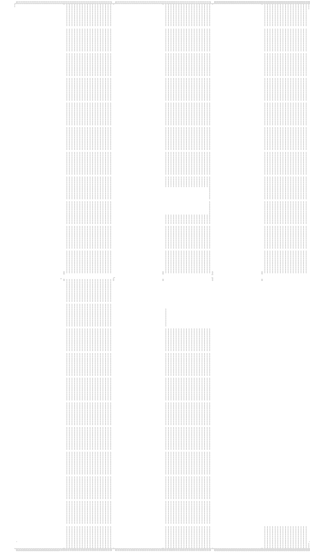

(Pmax/W)
(Vmp/V)
(Imp/A)
(Voc/V)
(Isc/A)
(%)
C: 1000 W/m ² , 25 °C, AM=1.5, NM T: 800 W/m ² , 20 °C, AM=1.5, 1 m/s +/- 3%;
10W
- & - 710W

STC	(Pmax/W)
	(Vmp/V)
	(Imp/A)
	(Voc/V)
	(Isc/A)
	(%)

(NM)	42 ± 2 °C
(Pmax)	-0.29%/°C
(Voc)	-0.25%/°C
(Isc)	0.046%/°C